


Thai BIM Slab Precast synthetic | S001 | Slab plan


MODEL DETAIL | 1:50 | Dimensions mm / levels m | local Member view / actual cage

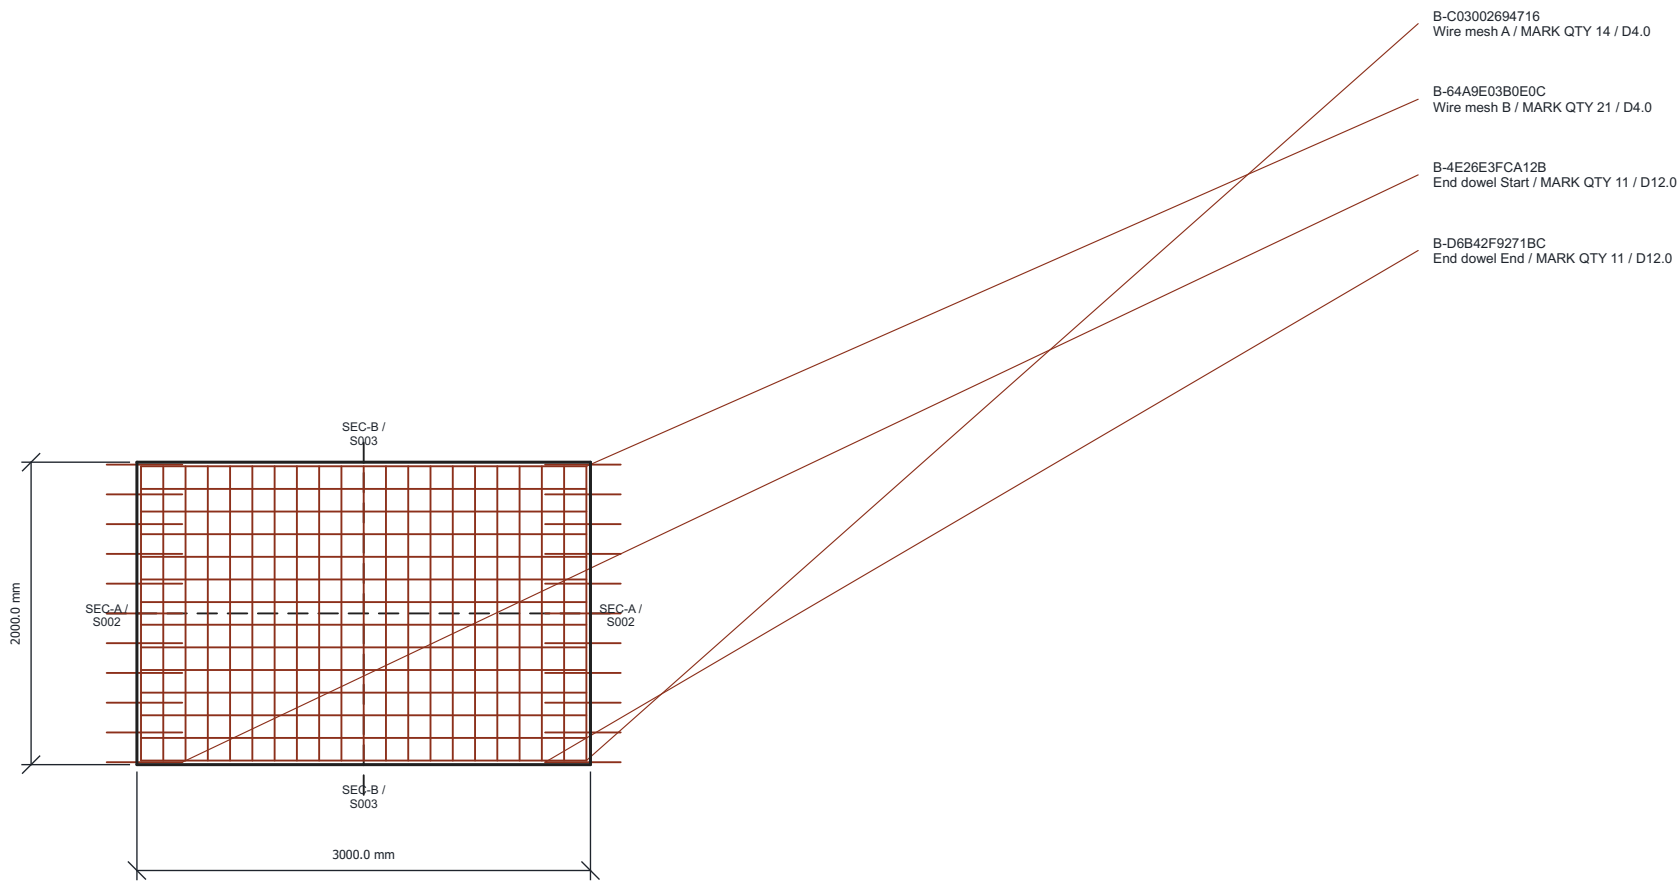

Slab mesh extents 3000 x 2000 x 200 mm | Actual concrete section; heavy = cut, grey = projected context; overall dimensions are local mesh extents. Red = complete actual cage projection (coincident paths overlaid).

Actual cage projected in red; leaders identify representative roles. All marks, counts and cut lengths in details / BBS.


Scale check: 1 m = 20 mm; print at 100%



|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: S001                              | REV: 01          |
| SCALE: 1:50 @ A3                         | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |

Thai BIM Slab Precast synthetic | S002 | Section A-A / local X


MODEL DETAIL | 1:50 | Dimensions mm / levels m | local Member view / actual cage

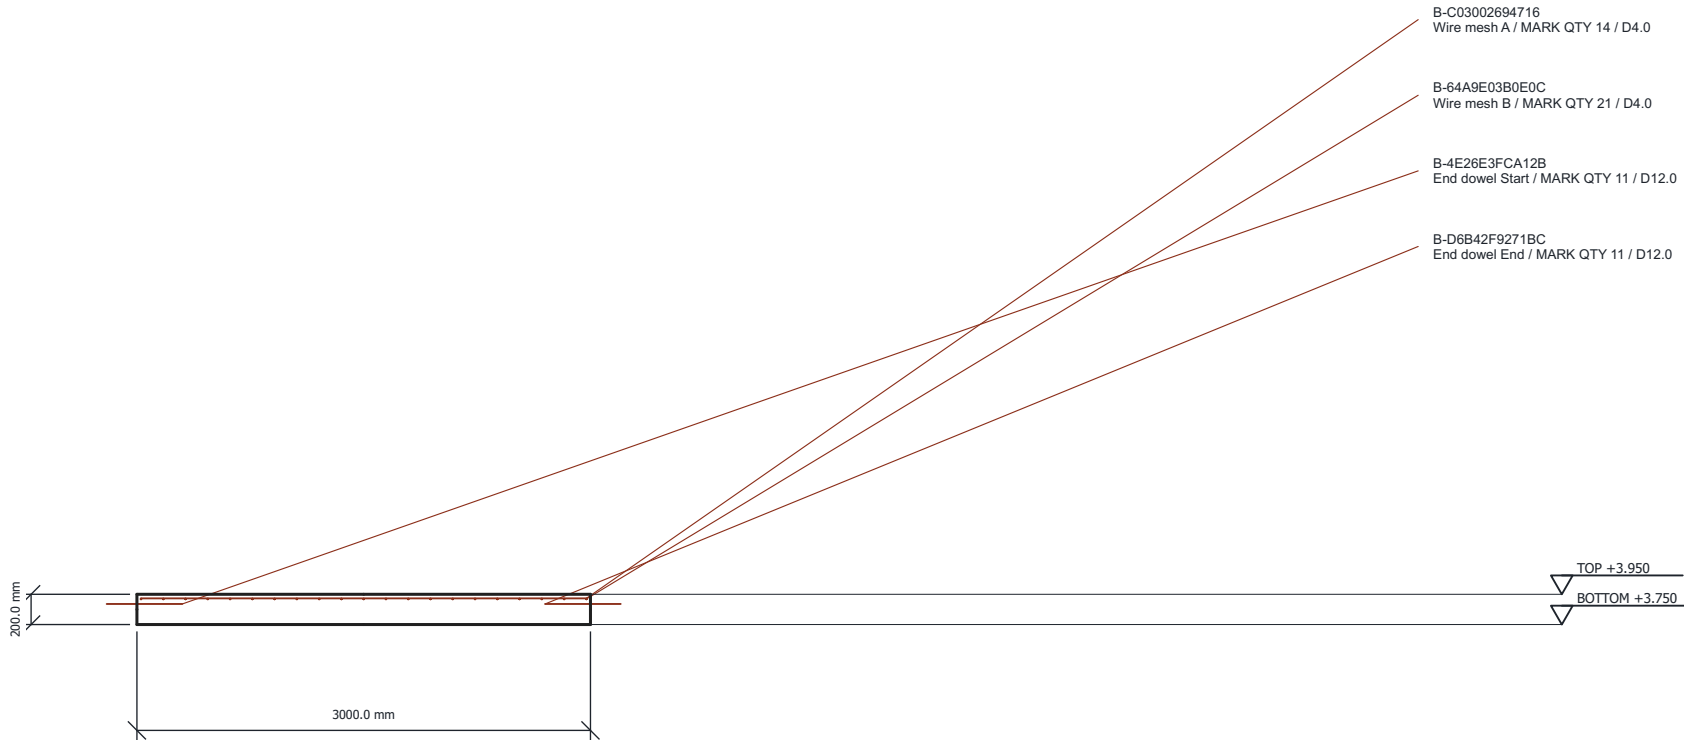

Slab mesh extents 3000 x 2000 x 200 mm | Actual concrete section; heavy = cut, grey = projected context; overall dimensions are local mesh extents. Red = complete actual cage projection (coincident paths overlaid).

Actual cage projected in red; leaders identify representative roles. All marks, counts and cut lengths in details / BBS.


Scale check: 1 m = 20 mm; print at 100%



|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: S002                              | REV: 01          |
| SCALE: 1:50 @ A3                         | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |

Thai BIM Slab Precast synthetic | S003 | Section B-B / local Y


MODEL DETAIL | 1:50 | Dimensions mm / levels m | local Member view / actual cage

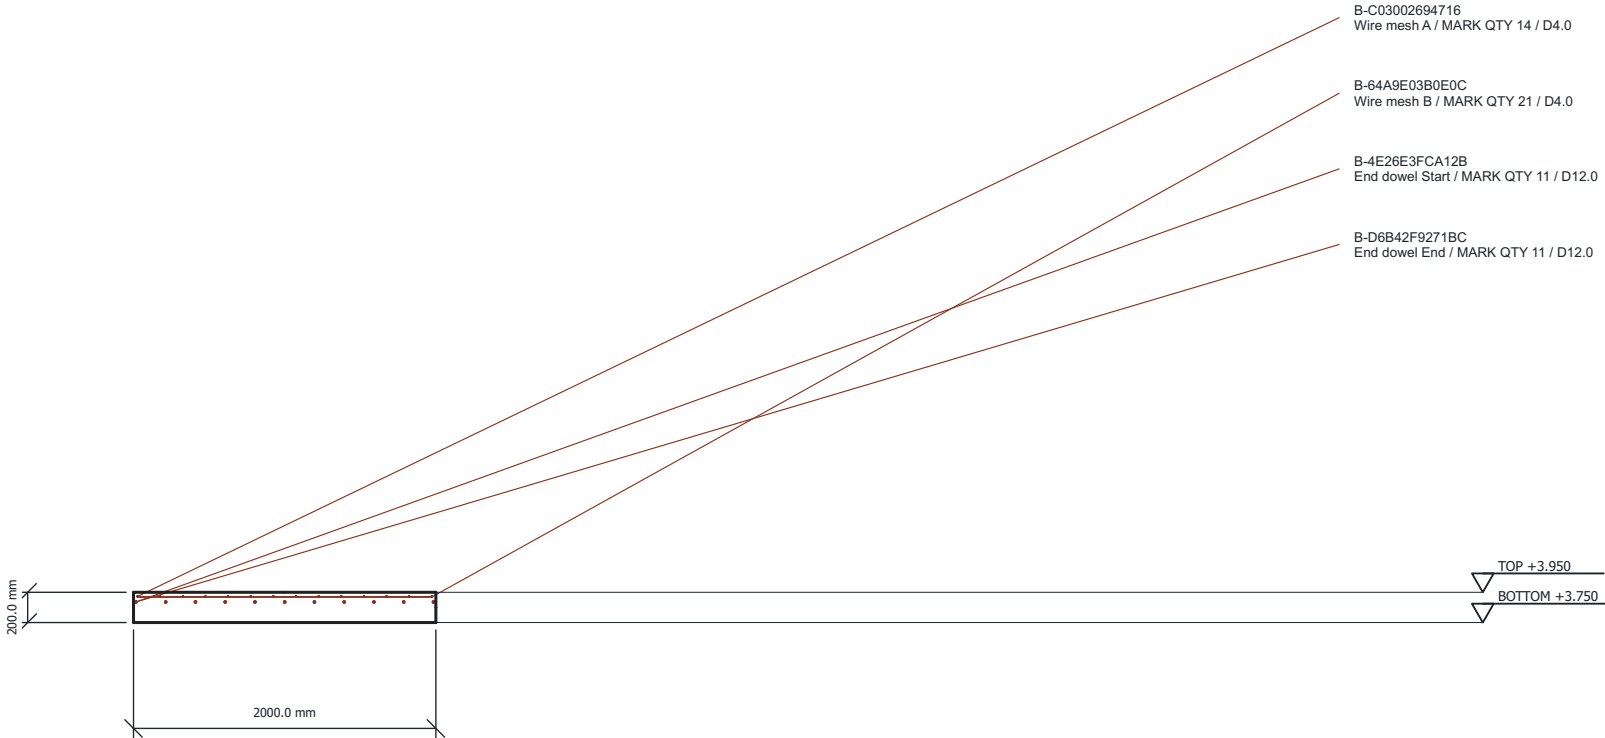

Slab mesh extents 3000 x 2000 x 200 mm | Actual concrete section; heavy = cut, grey = projected context; overall dimensions are local mesh extents. Red = complete actual cage projection (coincident paths overlaid).

Actual cage projected in red; leaders identify representative roles. All marks, counts and cut lengths in details / BBS.

Scale check: 1 m = 20 mm; print at 100%



|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: S003                              | REV: 01          |
| SCALE: 1:50 @ A3                         | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |


Thai BIM Slab Precast synthetic | S004 | B-4E26E3FCA12B / Shape plane

MODEL DETAIL | 1:50 | Dimensions mm / levels m | local Member view / actual cage



BAR MARK B-4E26E3FCA12B | QTY 11 | Diameter 12 mm  
ROLE: End dowel Start  
Cut length 500.000 mm | Inside bend radius 6 mm  
Straight tangent lengths mm: 500.00  
Bend angles deg:  
Steel: Nominal diameter; grade unspecified  
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 20 mm; print at 100%



|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: S004                              | REV: 01          |
| SCALE: 1:50 @ A3                         | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |


Thai BIM Slab Precast synthetic | S005 | B-64A9E03B0E0C / Shape plane

MODEL DETAIL | 1:50 | Dimensions mm / levels m | local Member view / actual cage



BAR MARK B-64A9E03B0E0C | QTY 21 | Diameter 4 mm  
ROLE: Wire mesh B  
Cut length 1946.000 mm | Inside bend radius 2 mm  
Straight tangent lengths mm: 1946.00  
Bend angles deg:  
Steel: Nominal diameter; grade unspecified  
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 20 mm; print at 100%



|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: S005                              | REV: 01          |
| SCALE: 1:50 @ A3                         | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |


Thai BIM Slab Precast synthetic | S006 | B-C03002694716 / Shape plane

MODEL DETAIL | 1:50 | Dimensions mm / levels m | local Member view / actual cage



BAR MARK B-C03002694716 | QTY 14 | Diameter 4 mm  
ROLE: Wire mesh A  
Cut length 2946.000 mm | Inside bend radius 2 mm  
Straight tangent lengths mm: 2946.00  
Bend angles deg:  
Steel: Nominal diameter; grade unspecified  
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 20 mm; print at 100%



|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: S006                              | REV: 01          |
| SCALE: 1:50 @ A3                         | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |


Thai BIM Slab Precast synthetic | S007 | B-D6B42F9271BC / Shape plane

MODEL DETAIL | 1:50 | Dimensions mm / levels m | local Member view / actual cage



BAR MARK B-D6B42F9271BC | QTY 11 | Diameter 12 mm  
ROLE: End dowel End  
Cut length 500.000 mm | Inside bend radius 6 mm  
Straight tangent lengths mm: 500.00  
Bend angles deg:  
Steel: Nominal diameter; grade unspecified  
BBS basis: Analytic tangent straights + centreline radius × bend angle

Scale check: 1 m = 20 mm; print at 100%



|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: S007                              | REV: 01          |
| SCALE: 1:50 @ A3                         | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |

Thai BIM Slab Precast synthetic | BBS01 | Bar bending schedule

BBS SCHEDULE | Table NTS | Actual-cage marks and analytic cut lengths

| BAR MARK       | ROLE / STEEL                                        | D mm | QTY | CUT m | TOTAL m | MASS kg |
|----------------|-----------------------------------------------------|------|-----|-------|---------|---------|
| B-4E26E3FCA12B | End dowel Start Nominal diameter; grade unspecified | 12   | 11  | 0.500 | 5.500   | 4.883   |
| B-64A9E03B0E0C | Wire mesh B Nominal diameter; grade unspecified     | 4    | 21  | 1.946 | 40.866  | 4.031   |
| B-C03002694716 | Wire mesh A Nominal diameter; grade unspecified     | 4    | 14  | 2.946 | 41.244  | 4.069   |
| B-D6B42F9271BC | End dowel End Nominal diameter; grade unspecified   | 12   | 11  | 0.500 | 5.500   | 4.883   |

Counts and analytic cut lengths match actual-cage BBS Bar Marks; no procurement waste / laps inferred.

|                                          |                  |
|------------------------------------------|------------------|
| PROJECT: Thai BIM Slab Precast synthetic | DATE: 2026-10-04 |
| SHEET: BBS01                             | REV: 01          |
| SCALE: NTS / table                       | AUTHOR:          |
| STATUS: MODEL DETAIL / REVIEW            | MODEL: Slab      |